

Muse iWash®
Integrated Bidet Toilet, CEL
C-20 bowl, S-20 bidet seat

Bowl Features

- Vitreous china toilet bowl
- Chair-height (16-1/2"), compact-elongated bowl
- MicroGlaze™ anti-microbial, stain-resistant glaze
- 12" (305mm) rough-in

Siphon Flushing System

- High-performance, siphon jet flush
- 1.28 gallons (4.8 liters) per flush - High-efficiency toilet (HET)
- Fully glazed, 2-1/8" internal trapway
- Large 9" x 7" water surface area
- Automated or manual flush activation
- Bowl-cleaning pre-mist

Bidet Features

- Instant water heating system (unlimited warm water)
- Self-cleaning, antimicrobial stainless steel adjustable nozzle
- Silent close lid
- Rear, front and oscillating spray options
- Adjustable water temperature and pressure
- Warm air drier with adjustable temperature
- Built-in deodorizer
- Heated seat with adjustable temperature
- LED in-bowl nightlight
- Power-saving modes
- Save up to two user settings

Parts Included


- Bolt alcove cover tiles (set of 2)
- Water filter & brass adapter
- 3/4" Transfer hose
- 1/2" Supply line
- Bowl / Rim jet supply lines (pre-installed) x2
- Top-side seat anchors and screws
- Rear mounting bolt and nut
- Remote control & wall-mount
- AAA battery x3

Quality Assurance

- Factory flush-tested
- Limited lifetime product warranty on ceramic bowl
- Three year limited product warranty on bidet seat



Dimensional Diagram

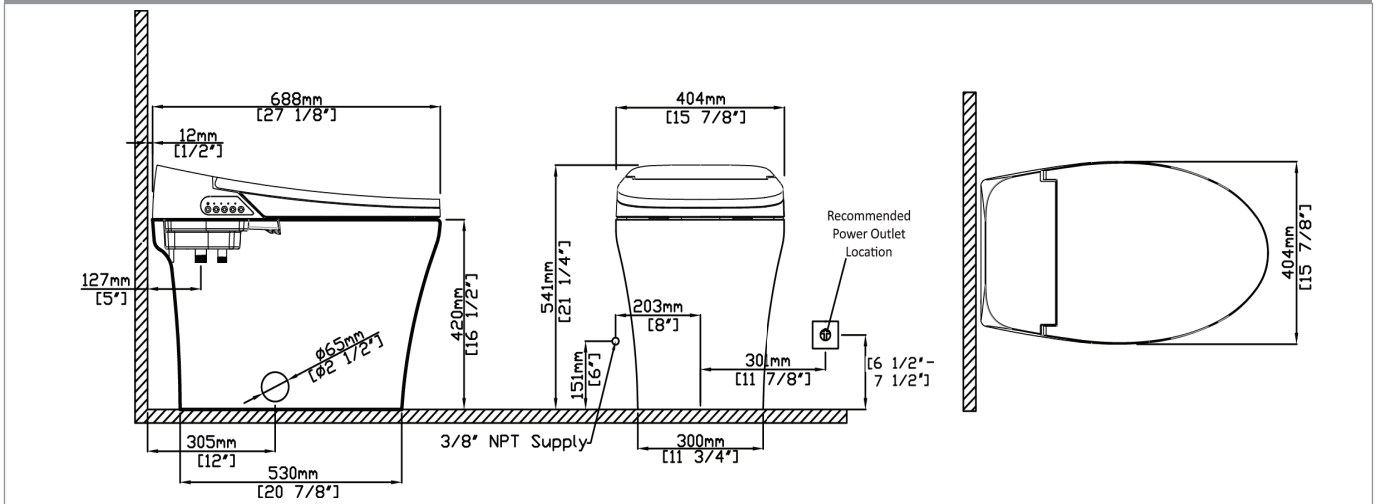

IMPORTANT: Dimensions are nominal and may vary within the range of tolerance per NSI Standard A112.19.2. These measurements are subject to change. No responsibility is assumed for use of superseded or voided pages.

Power Supply		120V, 60Hz	Heated Seat	Seat Temperature	82°F (28°C) 90°F (32°C) 98°F (37°C)
Max Power Consumption		1460W		Seat Heater Capacity	55W
Power Cord Length		3.9 ft (1.2 m)		Safety Device	Thermal Fuse
Water Supply Connection		Direct to water supply	Dryer	Temperature Adjustment	5 Levels
Water Supply Pressure		45 - 99PSI		Heater Capacity	164W
Spray Settings	Water Flow Rate	.65L/min		Safety Device	Thermal Fuse Bi-metal
	Water Pressure	5 Levels	Ambient Temperature Range	37.4° - 104°F (3° - 40°C)	
	Water Temperature	93.2°F (34°C) 98.6°F (37°C) 104°F (40°C)	Water Supply Temperature Range	37.4° - 95°F (3° - 35°C)	
	Water Heater Capacity	1400W	Deodorizer	Catalytic Deodorization	
	Safety Device	Thermal Fuse Thermostat	Seat top dimensions	15.9" x 26.9" x 5" (405mm x 685mm x 128mm)	
			Seat top weight	2.2lbs (6.3kg)	

Compliance Certifications

Meets or exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, UL 1431, CSA22.2 # 68

Certifications: IAPMO (cUPC), State of Mass, City of Los Angeles, CEC and others

Code Compliance: UPC, IPC, NPC and others

Meets the Americans With Disabilities Act (ADA) guidelines and ANSI A117.1 requirements for accessible building facilities. Check local codes.

